





1-866-443-6623
www.holdupdisplays.com
HD116
American Flag
Tactical Wall Display

Due to material process changes our aluminum extrusions may be shipped with coated or raw ends. End caps or your own trim are recommended. Furthermore, design updates in certain high capacity displays have eliminated the need for previously included connector plates and they are no longer included with each extrusion. If you are unable to install with staggered seams, or within 7 inches from an end to the nearest stud, please call 866-443-6623.

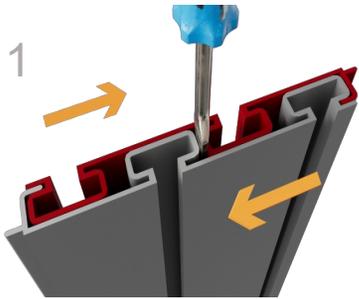

Rails will be nested back-to-back for safe shipping. Be sure to separate before assembling. (It may be necessary to use a screwdriver to separate rails)

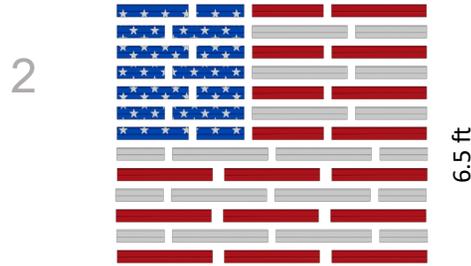

Choose a location and height for your rack taking into consideration clearance required to add and remove firearms from racks. Begin installation with the lowest row of rails.



Hold 4 ft rail against wall with the stacking tab down as shown above. Check level and draw a line along the top of the rail.




Using your preferred method, locate and mark every stud along the line.
NOTE: Studs must be within 7' from the end of the rail.



The mounting screws included are self-drilling. The screw itself will drill the hole it requires.



Insert mounting screw into screw guide.

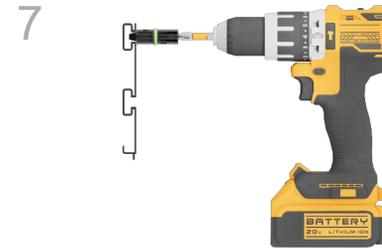


Place screw guide into channel at stud location. Firmly press both guide and drill towards rail and drive screw through channel into stud.




Check level and drive screws at each stud location in both the top and bottom channels. Repeat steps 3-8 to complete row 1.



Mark lines vertically to the full height of the display.

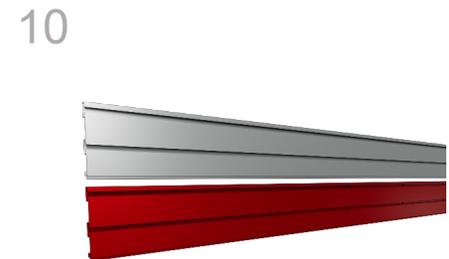


Mark and attach with screws each additional row to complete wall.

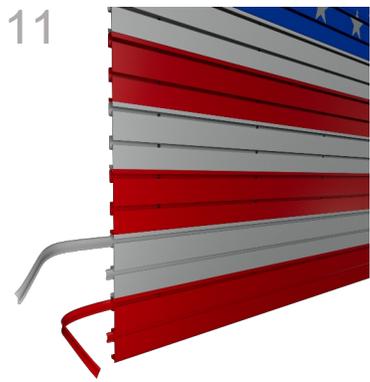

11 Insert screw cover strip from end of rail if accessible, otherwise press into slot with pen or marker.



12 Remove paper backing from white adhesive square. Place face down on rail as shown. Remove paper backing from second side and align end cap for desired finish

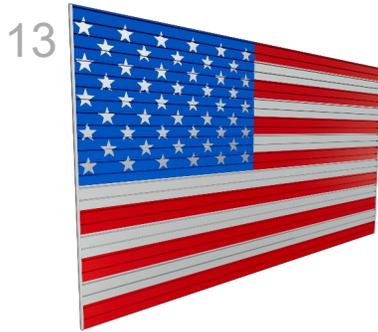

13 Press end cap firmly against rail for maximum bond strength. (Adhesive bonds instantly so you have one chance)



14 Tilt fixtures to insert into slatwall channel.



15 Tilt and hook slatwall safety clip into bottom track of the channel on the left side of the hanger. Slide slatwall clip to the right.

Components:



SKU:	Description:	Quantity:
HD09-3SW	Pistol Holder	12
HD53-3SW	Vertical 6 Rifle Rack	4
HD75-SW	Heavy Duty Shelf	8
HD46	Slatwall Clip	22
HD42	Screw Guide Kit	1
8X2" Self Drilling Screw	Mounting Screw	312
White Adhesive Square	Adhesive Square	4 Sheets of 6
HD94-3SW	Magazine Holder	14
HD 105-3SW	3-Rifle Rack	2
HDSW2E-LS30	30 inch End Cap	2
HDSW2E-LS48	48 inch End Cap	2
INSERT	2ft Screw Cover Vinyl Insert-Light Silver	26
	3ft Screw Cover Vinyl Insert-Light Silver	20
	3 ft Screw Cover Vinyl Insert-Red	8
	4 ft Screw Cover Vinyl Insert-Light Silver	18
	4 ft Screw Cover Vinyl Insert-Red	26
SW22RAIL-STAR	2 ft Star Slatwall Panel	7
SW23RAIL-STAR	3 ft Star Slatwall Panel	7
SW23RAIL-R	3 ft Red Slatwall Panel	4
SW24RAIL-R	4 ft Red Slatwall Panel	13
SW22RAIL-LS	2 ft Light Silver Slatwall Panel	6
SW23RAIL-LS	3 ft Light Silver Slatwall Panel	3
SW24RAIL-LS	4 ft Light Silver Slatwall Panel	9