


2) Align hangers back to back. Begin with one hanger flush with each end of the rack & evenly space hangers in between.




3) To prevent hangers from lifting, use 2" bolts and nuts in the bottom hole of the plate (as shown in FIGURE A below).

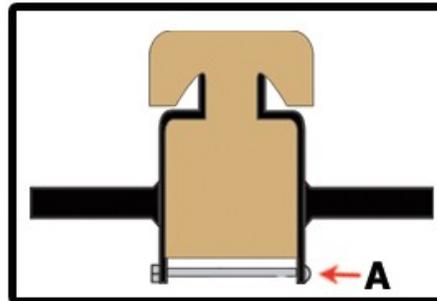

CAUTION: Snug is tight enough. DO NOT over tighten or the rack could be damaged.

4) Fully thread yoke all the way into the hanger, then back out one half turn to the desired position, allowing the yoke to pivot freely. If needed, adjust yoke width until crossbow can pass freely through opening (as shown in FIGURE B below).

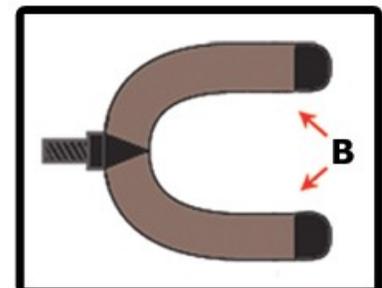

5) To set all right or left facing angles the same, measure from the rack to the end of the arm where the yoke threads in and tighten thumbscrew at desired angle.