




1-866-443-6623
www.holdupdisplays.com

HD53-FW Wall Mount Firearm/Bow Rack

5

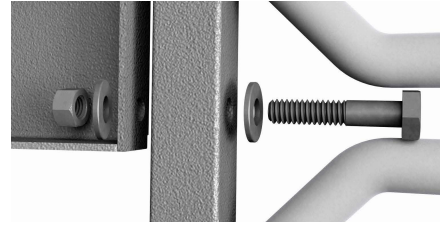

Attach bottom bar with bolts, washers, and nuts provided.



1




Locate studs, double check 16" on centers. Assure height of rack allows room to remove your longest barreled rifle.

2



Partially drive (2)-2 inch #10 mounting screws 16" on center into studs at desired location for bottom rack. Leave approximately 1/4" gap between the wall and screw head.


6

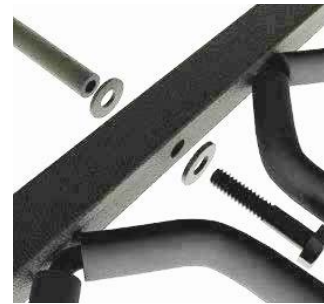

Assemble top bar with bolts and washers provided.




3

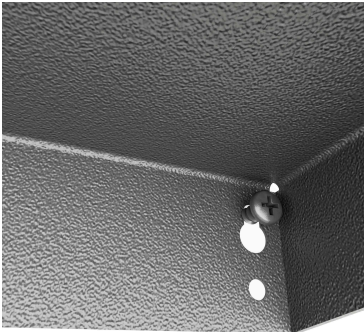

Hang mounting shelf bracket on screws and double check level.

4

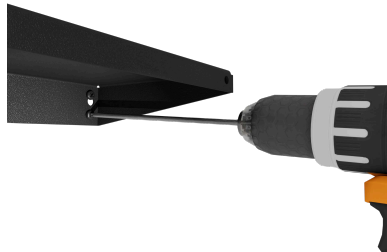

Using the included 8" Philips extension bit, drive lower 2 inch #10 mounting screws into the studs. Then tighten upper screws.

7













Locate desired height of top bar. Mount first plate to wall studs using 1.5 inch #8 screws provided.

8



Check level and mount second plate.

	SKU:	Quantity:
	Bottom Bar	1
	Top Bar	1
	1/4-20 Nut	2
	Bolt 1/4-20x1.25	4
	Screw 8x1.5"	4
	Screw 10x2"	4
	Washer 25	8
	Bottom Shelf Bracket	1
	Top Plate	2
	8" Philips Extension Bit	1